

Field Assembly Optical Connector

SC Soft Boot

DESCRIPTION

KOC's SC Soft type Field Assembly Optical Connector(FAOC) is designed with compact size in order to fit for small size terminal box or fiber distribution frame ,terminated with bare fiber or 0.9mm jacket cable. The FAOC is made with high precision and quality zirconia ferrule and provide a highly reliable connection in most of the fiber optic network application.



FEATURES

Highly stable and reliable performance
 Intermateability IEC 61754-4
 EU regulation : RoHS
 Flammability Grade : UL94 V-0
 High Success Rate design and technology
 Reusable termination capability(up to 5 times)

APPLICATION

Fiber To The Home network
 Fiber Optic cable Distribution network

Classification	Length	Cable Size	Part Number	Color	
				Body	Boot
SC Soft Boot	45mm	0.25mm (Bare fiber)/ 0.9mm	FAOC-SC/UPC-SM-S(45)-0025/0090	Blue	Gray
			FAOC-SC/APC-SM-S(45)-0025/0090	Green	Gray
			FAOC-SC/UPC-OM1-S(45)-0025/0090	Beige	Gray
			FAOC-SC/UPC-OM2-S(45)-0025/0090	Beige	Gray
			FAOC-SC/UPC-OM3-S(45)-0025/0090	Aqua	Gray
			FAOC-SC/UPC-OM4-S(45)-0025/0090	Aqua	Gray

USER GUIDE

Fiber/Cable	Size (mm)	SC					
		SC Hard Boot			SC Soft Boot 45	SC Folder Boot 56	SC Universal 51
		50	51	56			
Bare Fiber	0.25	○			○		○
Indoor Cable	0.9	○			○		○
	2.0		○				○
	3.0		○	○			○
FTTH Drop Cable	3.0		○	○			○
	2.0 x 3.0		○			○	○




Field Assembly Optical Connector

SC Soft Boot

DIMENSION

SC Hard Soft 45mm

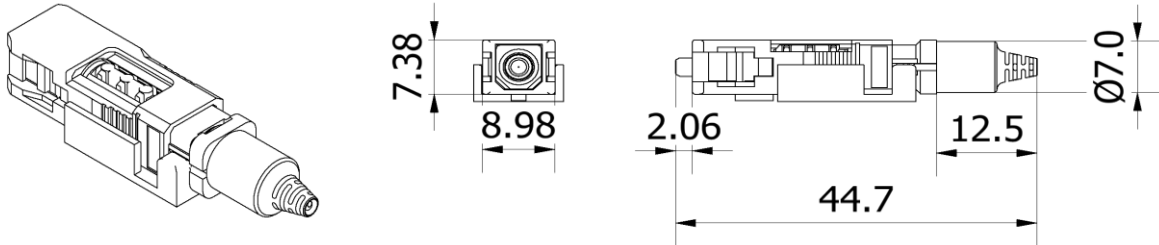

OPTICAL PERFORMANCE

Characteristics	Condition	Unit	Value		
			Min	Mean	Max
Insertion Loss	UPC	dB		0.30	0.50
	APC	dB		0.30	0.50
Return Loss	UPC	dB	50.0	53.0	
	APC	dB	55.0	62.0	

GEOMETRY MANAGEMENT

PARAMETER	Unit	SPEC(PC/APC)	REFERENCE
Radius of Curvature	mm	7~25 / 7~12	GR-326-CORE 4.4.5 Geometry Requirement.
Dome Offset(Max)	um	50 / 50	
Undercut or Protrusion(Max)	nm	-125~50 / -100~100	

END FACE MANAGEMENT

ZONES	SCRATCHES	DEFECTS	REFERENCE
A : Core (0 to 25um)	None	None	IEC 61300-3-35
B : Cladding (25 to 120um)	No limit : <= 3um None : > 3um	No limit : < 2um Five : from 2 to 5um None : > 5um	
C : Adhesive (120 to 130um)	No limit	No limit	
D : Contact (130 to 250um)	No limit	None : >=10um	



Field Assembly Optical Connector

SC Soft Boot

ORDERING INFORMATION

